

COMMERCIAL ADHESIVE SPEAKERS

Superb quality background music speaker. . .

. . . no grills, no cut-outs for uninterrupted ceiling aesthetics

Description

The CEAD Acoustic commercial adhesive speaker is designed to be installed on the plenum (top) side of standard mineral fibre and plasterboard ceiling tiles. Can also be installed above plasterboard ceilings and behind plasterboard walls.

Installation

Installation could not be easier. Peel off release paper to expose the adhesive and apply speaker to the cleaned surface of the ceiling tile or plasterboard.

The speaker is designed to have some of the frequencies absorbed by the mineral fibre or plasterboard. It is recommended that an equaliser is used for additional compensation and audio enhancement.


Applications

Background music and sound masking in hospitals, offices, restaurants and retail environments where maintaining ceiling aesthetics is imperative.



CEAD Adhesive Speaker	Channels	1
	Efficiency	82dB (1m/1w)
	Max S.P.L.	> 92 dB @1m
	Power	10w
	High pass filter	120Hz
	Nominal Impedance	8 ohms
	Dimensions	400mm x 300mm x 71mm
	Weight	950g

Response of a CEAD Adhesive ceiling tile speaker adhered to 1/2 inch (13mm) plasterboard

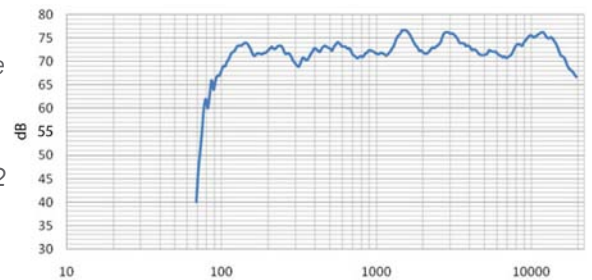

CEAD AV Partnership
ABN: 70 077 968 897
Level 1, 727 Stanley Street
Woolloongabba 4102 QLD Australia
Telephone: +61 (0)7 3391 4888
Email: avsales@cead.com
Web: www.cead.com

CEAD AV Inc
BN: 85508 1121
Suite 320, 171 East Liberty Street
Toronto Ontario M6K 3P6 Canada
Telephone: +1 416 366 2323
Email: avsales@cead.com
Web: www.cead.com